



UNIVIEW[®]

1300

1100

1%

SOLAR AND OPTICAL PROPERTIES

SOLAR GAIN

The amount of heat increase resulting from solar energy entering a room. It is the total of three separate parts - the amount of energy transmitted directly into the room, the energy which is absorbed by the blind and a proportion of the energy which is absorbed by the window.

SHADING CO-EFFICIENT

The solar heat gain with the blind at the window divided by the solar heat gain with no blind at the window. The lower the shading co-efficient, therefore, the higher the efficiency of the fabric.

UNIVIEW® SOLAR AND OPTICAL PERFORMANCE																	
	Solar			Visible			UV	QRF	CF	GTOT				SC			
	RS %	TS %	AS %	RV %	TV %	AV %	Block %			SG	DG	TG	DGLE	SG	DG	TG	DGLE
Uniview® 1300																	
Crystal	73	11	16	84	8	8	99	8	5+	0.28	0.32	0.33	0.33	0.33	0.36	0.37	0.38
Alabaster	69	11	21	77	6	16	99	7	5+	0.31	0.34	0.35	0.35	0.36	0.39	0.40	0.40
Beige	63	11	25	71	7	21	99	7	5+	0.35	0.37	0.37	0.38	0.40	0.43	0.42	0.44
Cool Grey	55	8	37	63	5	33	98	6	5+	0.37	0.40	0.39	0.41	0.43	0.46	0.45	0.47
Soft Steel	39	5	56	43	2	55	99	4	5+	0.45	0.47	0.45	0.48	0.52	0.54	0.52	0.55
Pearl Grey	51	7	42	58	4	38	99	5	5+	0.39	0.41	0.40	0.42	0.45	0.48	0.46	0.49
Stellar	7	1	92	8	1	91	99	1	5+	0.61	0.61	0.56	0.61	0.70	0.70	0.64	0.70
Jet	4	2	94	4	2	94	98	0	5+	0.63	0.63	0.57	0.63	0.72	0.72	0.66	0.72
Uniview® 1100																	
Shadow	35	7	58	37	4	59	99	4	5+	0.33	0.36	0.36	0.37	0.38	0.42	0.42	0.43
Winter White	72	12	16	83	9	8	99	8	5+	0.29	0.32	0.33	0.33	0.33	0.37	0.38	0.38
Canola	67	12	21	75	8	17	99	7	5+	0.31	0.34	0.34	0.35	0.35	0.39	0.39	0.40
Storm	25	5	70	27	3	70	99	3	5+	0.35	0.38	0.38	0.39	0.40	0.43	0.43	0.45
Nutmeg	19	4	76	21	3	76	99	2	5+	0.36	0.39	0.38	0.40	0.41	0.45	0.44	0.46
Twilight	16	3	81	18	3	79	99	2	5+	0.36	0.39	0.39	0.40	0.42	0.45	0.45	0.46

GLOSSARY

T: % Transmittance.

R: % Reflectiveness.

A: % Absorption.

UV Block: Percentage of UV light blocked by the fabric.

QRF: Quick Reference Factor.

CF: Colour Fastness.

gtot: The solar factor entering a building through a window and the shading device combined.

SC: Shading Co-efficient.


SG: Single Glazing.

DG: Double Glazing.

TG: Triple Glazing

DGLE: Double Glazing Low Emissivity.

UNIVIEW® 1300

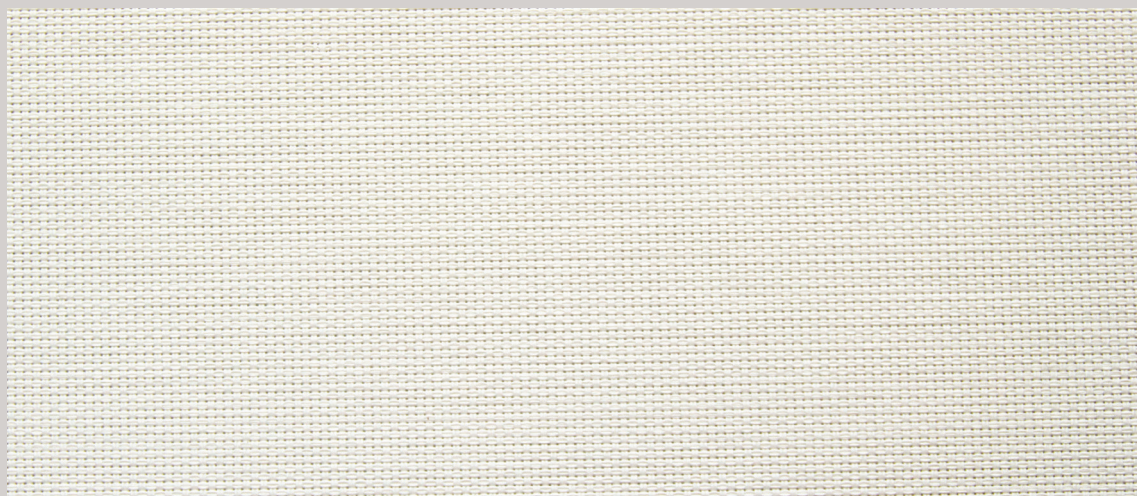

CRYSTAL

RPU723 - 1.83m

RPU731 - 2.50m

RPU739 - 3.00m



ALABASTER

RPU728 - 1.83m

RPU736 - 2.50m

RPU744 - 3.00m



BEIGE

RPU722 - 1.83m

RPU730 - 2.50m

RPU738 - 3.00m



COOL GREY

RPU729 - 1.83m

RPU737 - 2.50m

RPU745 - 3.00m




SOFT STEEL

RPU727 - 1.83m

RPU735 - 2.50m

RPU743 - 3.00m

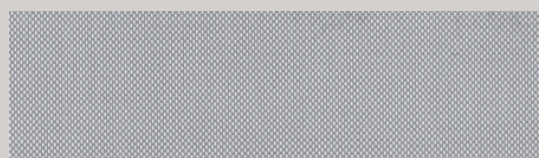


PEARL GREY

RPU724 - 1.83m

RPU732 - 2.50m

RPU740 - 3.00m

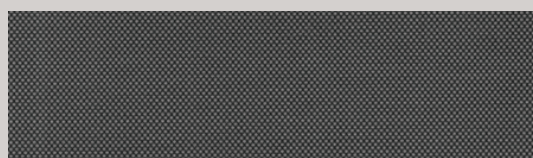


STELLAR

RPU726 - 1.83m

RPU734 - 2.50m

RPU742 - 3.00m

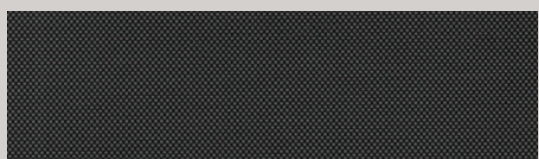

JET

RPU725 - 1.83m

RPU733 - 2.50m

RPU741 - 3.00m

UNIVIEW® 1300


Also available in 3%
(Uniview 3000)

UNIVIEW® 1100



SHADOW

RPU750 - 1.83m
RPU756 - 2.50m
RPU762 - 3.00m

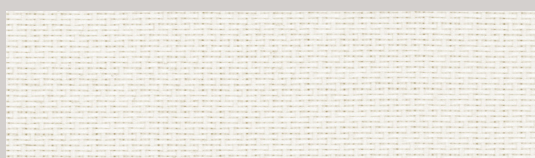


WINTER WHITE

RPU753 - 1.83m
RPU759 - 2.50m
RPU765 - 3.00m



CANOLA

RPU754 - 1.83m
RPU760 - 2.50m
RPU766 - 3.00m

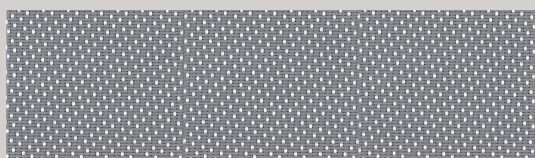


STORM

RPU751 - 1.83m
RPU757 - 2.50m
RPU763 - 3.00m




NUTMEG

RPU749 - 1.83m
RPU755 - 2.50m
RPU761 - 3.00m

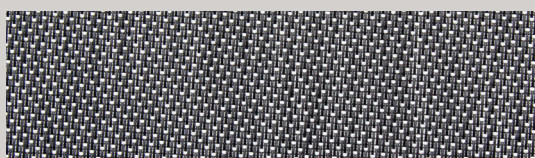

TWILIGHT

RPU752 - 1.83m
RPU758 - 2.50m
RPU764 - 3.00m

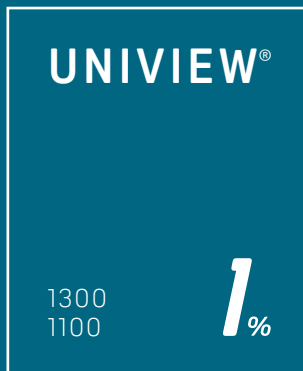

Uniview® 1300 and 1100 fabrics are designed to satisfy the highest technical and aesthetic standards as demanded by today's residential, commercial, educational and healthcare applications.

Providing the best in transparent solar shading solutions, Uniview® fabrics are durable, washable and will not fray. Achieving the BS5867: 2008 Part 2 Type B standard for flammability standard, Uniview is also non-toxic, UV and bacteria resistant.

UNIVIEW® SPECIFICATIONS		
Series	1300	1100
Colour Range	8	6
Roller Roll Length	25-35m	25-35m
Roller Roll Width	1.83m / 2.5m / 3m	1.83m / 2.5m / 3m
Fabric Composition	30% Polyester, 70% PVC	30% Polyester, 70% PVC
Mesh/cm	24 x 20	24 x 20
Mesh Weight	490g/m ²	480g/m ²
Yarn Diameter	0.32mm	0.32mm
Thickness	0.61mm	0.62mm
Breaking Strength	438lbs x 370lbs /5CM ISO13934-1	438lbs x 370lbs /5CM ISO13934-1
Openness Factor	1%	1%
Care & Washing	Do not soak. Clean by gently wiping with a sponge.	Do not soak. Clean by gently wiping with a sponge.
Colour Fastness	BS EN ISO 105-B02: 2014 (colour fastness to artificial light Std 5)	BS EN ISO 105-B02: 2014 (colour fastness to artificial light Std 5)
Flammability Standards	BS5867 (2008 Part 2, Type B), B1 DIN-4102	BS5867 (2008 Part 2, Type B), B1 DIN-4102
Anti-Fungal	ASTM G21	ASTM G21
Property	Dimout	Dimout
Samples	Fabric samples available on request	Fabric samples available on request



